

parallel
flooring accessories limited

Frontier House, Pasture Lane,
Market Rasen, Lincolnshire LN8 3DT

T: +44 (0)1673 844424

F: +44 (0)1673 843135 (sales)

F: +44 (0)1673 844888 (admin)

www.flooring-trims.com

Trims, Stairnosings and Accessories for
Wood and Laminated Flooring

parallel

flooring
accessories
limited

The UK's Market Leader

Established in 1996 Parallel Flooring Accessories Limited has now for over a decade been producing the highest quality profiles and accessories available for use with wood and laminate flooring materials. Its extensive range of Prefinished Hardwood, Aluminium, PVC and MDF products have long been the preferred choice of quality wood & laminate flooring manufacturers, distributors and merchants throughout the UK. As the largest supplier of its product type, the company's success is based on its innovative and original approach to product design and development, and its uncompromising attitude to quality customer service.

“innovative and original approach to product design..”

Environmental Policy

Through various bodies, it is the intention/objective of the company to be fully involved in the pursuit of legal, fully managed and sustainable forest resources.

This ethos is reinforced through our purchasing policy. The company has made a substantial commitment to waste management, recycling and its carbon footprint. All PVC and paper/card waste is bailed on site and recycled, whilst scrap timber and wood chippings are fed into our burner as fuel, to heat the factory.

Certifiable Products

The company is committed to supporting certifiable products where CoC (Chain of Custody) from forest to consumer can be correctly verified. This may be through a number of forest initiatives recognised within the timber trade. Where possible, preference will be given to supply from legal, sustainable and certified schemes.

Solutions for Edging Floors

Parallel manufacturers and supplies an extensive range of profiles and accessories specifically designed for use with Solid Wood, Engineered Wood, Laminates, Carpet and Ceramics. The current range comprises floor trims, stair nosings, quadrant, scotia, skirting and sealants, all manufactured from the highest grade materials available. With options in Hardwood, PVC, MDF and Aluminium a complimentary and aesthetically pleasing finish is guaranteed regardless of the expansion joints, room perimeters, differing floor levels and steps/stairs. All traffic conditions are catered for, as well as different fixing requirements.

A Coordinated Finish

A comprehensive range of finishes in Hardwood, Aluminium, MDF and Veneer ensure that virtually all floor finishes can be matched.

Prefinished and unfinished hardwoods in 12 different species are held in stock. A further 30 plus stained finishes on Oak and Sapele are available to order for dispatch within 48hrs. Various lacquer and oil options are also available. Aluminium sections can be supplied raw (Mill) or in a variety of architectural grade anodised finishes including Sim Brass, Etch Brass, Etch Silver and Bronze. MDF profiles and scotia are stocked in 32 foil finishes with access to over 400 for special order.

Our colours and finishes are continuously being updated. For further information on matching and colour samples, please contact our sales office or your representative.

Innovative Product Development

Parallel takes pride in itself for being at the forefront of the UK's wood and wood laminate accessories market. A proactive approach to product development ensures that our range moves with the market to the make sure the customers' needs are fulfilled. To keep up to date with new products, news and developments visit our website at www.flooring-trims.com.

To receive information direct, please provide the sales office with your details.

Technical & Sales Support

The sales and technical office are able to provide support with specifying, ordering, fitting and maintaining Parallel products. CAD and PDF versions of all of the profile drawings are also readily available.

For any queries or questions please don't hesitate to contact the office on +44(0)1673 844424

Specifying Parallel Products

In order to guarantee you receive Parallel products and not an inferior copy, our products should be specified by product name/code, base size (where applicable), finish/colour and length (where applicable). The sales and technical team will be more than happy to recommend suitable profiles and solutions for all applications.

24 Hour UK Delivery Service

Via a nationwide network of distributors and wholesalers, Parallel products are conveniently accessible across the whole of the UK. All orders are dispatched on a next day courier service for delivery between 0800 and 1800. We aim to process and dispatch orders for stock items within 24 hours. Non-stock items are normally dispatched within 48 hours. New profiles or specially machined items can take between 7 to 10 days for delivery. All orders under £300 nett will be subject to a carriage.

Export Order Service

Parallel have a dedicated exports team in the UK sales office. Any queries with regard export, freight and/or customs can be made directly with the export department

Contents	Frontier Harmonie	Frontier Natural and Basics	Frontier Lite	Frontier Contract	Frontier Cover Plate	Frontier Duo	Frontier Woodline	Frontier Single Part Woodline	Frontier Carpetline	Frontier Woodline Stair Nosings	Frontier Hardwood Skirting and Architrave	Frontier Combistar and Clipstar	Frontier Sports	Profile Selection and Directory	Site Preparation	Material Specification
	PAGE 04 - 05	PAGE 06 - 07	PAGE 08 - 09	PAGE 10 - 11	PAGE 12 - 13	PAGE 14 - 15	PAGE 16 - 17	PAGE 18 - 19	PAGE 20 - 21	PAGE 22 - 23	PAGE 24 - 25	PAGE 26 - 27	PAGE 28 - 29	PAGE 30 - 31	PAGE 32 - 33	PAGE 34 - 35



frontier harmonie

Parallel's Frontier Harmonie MDF

Profiles are manufactured from

structurally sound, water resistant

materials. The mouldings are wrapped

with an Aluminium Oxide impregnated

foil, which increases the strength and

wear properties beyond the majority of

the laminate floors they complement.

The Harmonie range is available in an

extensive array of profile shapes and

wood effect finishes for floor heights of

between 6mm and 9mm. The Profiles

come complete with screws and a

revolutionary Steel base which can be

snapped to the desired length,

eradicating the need for cutting.

Complementary 2400mm MDF Scotia

is also available.

Standard finishes

Frontier Harmonie MDF Profiles are available in 33 wood effect finishes. These include a variety of Oak, Beech, Maple, Cherry, Iroko, Mahogany, Merbau, Wenge and Walnut colours.

Special Finishes

In addition to the standard wood effect finishes, we have access to over 500 foil colours.

All of which are available to order (dependent upon quantities required).

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge.

Please contact our sales office for further details Tel +44 (0) 1673 844424



HT TWIN

Specifying Harmonie

Frontier Harmonie is specified by name, profile shape, length and finish. Suitable to compliment any surface with a finished floor height of between 6mm and 9mm.

Packaging and Supply

All profiles are supplied complete with selected top section, pre-drilled base and screws. All finishes are available in either 900mm or 2400mm lengths. Standard distributor packaging consists of 7 x 900mm and/or 7 x 2400mm lengths.

Fixing and Maintenance

Frontier Harmonie base section is fixed using the countersunk wood screws provided and a proprietary gap fill adhesive. The top section is then tapped into the fixed base with a rubber mallet.


profiles




HR RAMP



HSK SKIRTING

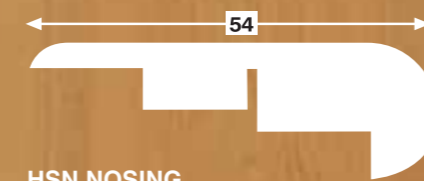


HSN NOSING

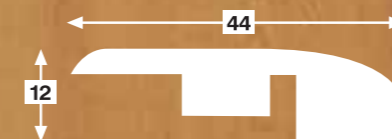


HR RAMP




HT TWIN



HE END



HSC SCOTIA



BASE

MATERIAL	TOP SECTION MDF
	BASE SECTION Steel
FINISHES	33 Wood Effect Finishes
TRAFFIC	Light Contract and Domestic
FIXING	Screw Fix Base, Tap In Top Section
LENGTHS	900mm & 2400mm



frontier natural and basics

The Frontier Natural profiles give the look of wood with the strength of aluminium, enabling an almost invisible but durable expansion joint to be made between wood laminate and other flooring materials. Aluminium profiles are covered by a wood effect wrap impregnated with resins. This gives the product high impact resistance and good wear characteristics, making it ideal for domestic and light contract applications. Frontier Natural is available in 4 profile shapes in a choice of 7 wood effect finishes.

Frontier Basics

A compromise on cost but not on quality, the Basics range uses the same aluminium sections and base profiles as that of the Natural range, but is finished in etch anodised Brass or Silver providing a smooth metallic finish for light contract and domestic application.

Standard Finishes

Top profiles are available in the following wood effect and smooth metal finishes.

Natural: Oak 501, Oak 502, Beech 401, Beech 403, Cherry 302, Mahogany 201 and Maple 102.

Basic Profiles: Etch Silver and Etch Brass.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge.

Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Natural & Basics

Natural and Basics profiles are specified by the name, profile shape, base height, length and finish. Selecting the correct base section is determined by the finished floor height:

A finished floor height of 8mm – 12mm will require the low base (12mm)

A finished floor height of 13mm – 15mm will require the medium base (15mm)

A finished floor height of 18mm – 22mm will require the high base (22mm).

Fixing and Maintenance

Natural and Basics base sections are fixed using 31mm countersunk wood screws and a proprietary gap fill adhesive. The tops are then tapped into the base profile.

Packaging and Supply


All profiles are supplied complete with selected top section and pre-drilled base. All finishes are available in either 990mm or 3000mm lengths. Standard distributor packaging consists of 12 x 990mm and/or 6 x 3000mm lengths. As standard all items are pre-sealed in 500uM gauge layflat, however, numerous packaging, labeling and barcoding options are available on request.




profiles




BR 12 RAMP
BR 15 RAMP

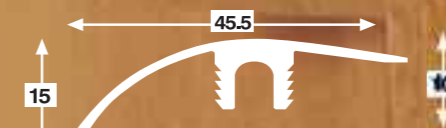


BHR 15 RAMP




NR 12 RAMP
NR 15 RAMP




NHR 15 RAMP



BT 12 TWIN
BT 15 TWIN
BT 22 TWIN



BE 12 END
BE 15 END
BE 22 END




NT 12 TWIN
NT 15 TWIN
NT 22 TWIN




NE 12 END
NE 15 END
NE 22 END



22 BASE



15 BASE



12 BASE



MATERIAL	BASIC Aluminium 6063 T6
	NATURAL PVC Covered Aluminium 6063 T6
FINISHES	BASIC Etch Silver or Etch Brass
	NATURAL 7 Wood Effect Finishes
TRAFFIC	Light Contract and Domestic
FIXING	Screw Fix Base, Tap In Top Section
LENGTHS	990mm & 3000mm

Profiles and bases shown actual size



frontier lite

Frontier Lite profiles are a range of anodised aluminium profiles with uPVC bases to edge and finish wood and laminate flooring materials. The Frontier Lite sections have been designed to be low profile and only protrude above the flooring surface by 2.5mm.

This allows for fitting under doors and preventing potential trip hazards when joints are made between flooring materials. All profiles have concealed fixings providing an aesthetically pleasing finish to the floor surface.

The aluminium top sections locate into serrated teeth in the PVC base creating a secure fixing which is height adjustable to suit all types of flooring with a finished height of between 8mm and 22mm.



Specifying Lite
Lite profiles are specified by the name, profile shape, base height, length and finish. Selecting the correct base section is determined by the finished floor height:

A finished floor height of 8mm – 12mm will require the low base (12mm)

A finished floor height of 13mm – 15mm will require the medium base (15mm)

A finished floor height of 18mm – 22mm will require the high base (22mm)



Fixing and Maintenance
Frontier Lite base section is fixed using 31mm countersunk wood screws and a proprietary gap fill adhesive. The top section is then tapped into the fixed base with a rubber mallet.

Packaging and Supply
All profiles are supplied complete with selected top section and pre-drilled base. All finishes are available in either 990mm or 3000mm lengths. Standard distributor packaging consists of 12 x 990mm and/or 6 x 3000mm lengths. As standard all items are pre-sealed in 500uM gauge layflat, however, numerous packaging, labeling and barcoding options are available on request.


Standard Finishes
Top profiles are available in the following architectural anodised finishes: Mill Finish, Sim Brass, Etch Brass, Etch Dark Bronze and Etch Silver. Other surface finishes can be supplied on request.

Colour Matching
Samples of all profiles, inserts, colours and finishes are available free of charge.
Please contact our sales office for further details Tel +44 (0) 1673 844424

profiles

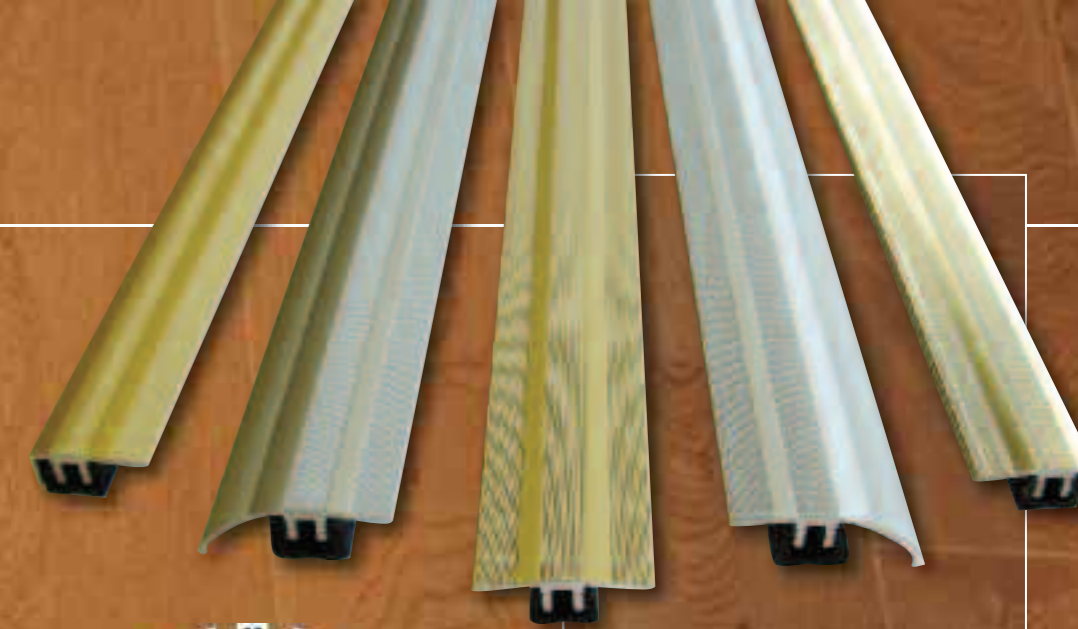

LR 12 RAMP
LR 15 RAMP

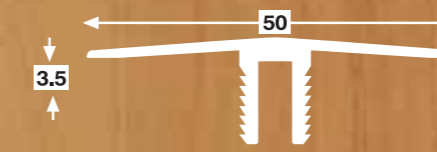


LLT22 TWIN



LHR 15 RAMP
LHR 22 RAMP




LT 12 TWIN
LT 15 TWIN
LT 22 TWIN

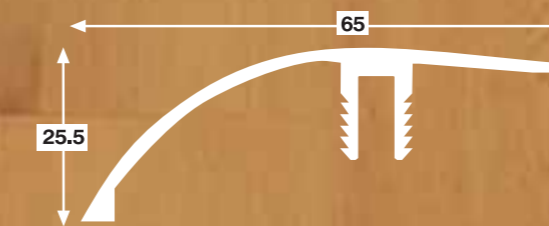


LLHR 22 RAMP




LE 12 END
LE 15 END
LE 22 END



22 BASE



15 BASE



13 BASE

MATERIAL	TOP SECTION Aluminium 6063 T6
	BASE SECTION: Rigid PVC (uPVC)
FINISHES	Mill Aluminium or 4 Anodised Finishes
TRAFFIC	Medium Contract /Domestic Use
FIXING	Screw Fix Base, Tap In Top Section
LENGTHS	990mm & 3000mm

Profiles and bases shown actual size



frontier contract

Frontier provides an attractive quality finish for wood flooring with a finished thickness of between 13mm and 22mm. Using the Frontier concealed fixing method, six different profiles and two standard bases combine to accommodate almost every combination of flooring material. Finishes from wood to other floor types such as ceramics, carpet and vinyls can be achieved using the ramp, transition or end cap sections. The top profile locates into the serrated base section enabling it to be adjusted to the height of the finished floor. The fixed trim remains independent of the wood flooring allowing for any expansion and contraction in the finished floor.

Standard Finishes

Top profiles are available in the following anodised architectural finishes: Mill finish, Sim Brass, Etched Dark Bronze, Etched Silver and Etched Brass. Other surface finishes can be supplied on request.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge.

Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Frontier

Frontier profiles should be specified by name, profile section, length and finishes.

**DISCONTINUED
SOME STOCK STILL
AVAILABLE**


Fixing and Maintenance

Frontier base sections are fixed using the 31mm pan head wood screws provided and a proprietary gap fill adhesive. The tops are then tapped into the base profile.


Packaging and Supply

All profiles are supplied complete with selected top section, pre-drilled base and screws. All finishes are available in either 990mm or 3000mm lengths. Standard distributor packaging consists 12 x 990mm and/or 6 x 3000mm lengths. As standard all items are pre-sealed in 500uM gauge layflat, however, numerous packaging, labeling and barcoding options are available on request. Please contact our sales office for details.


profiles

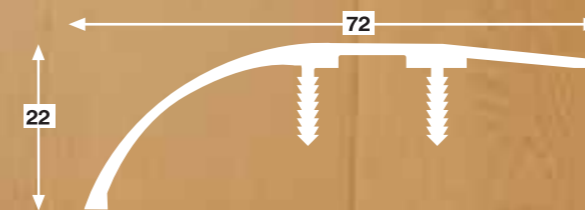


NFR3 22 RAMP

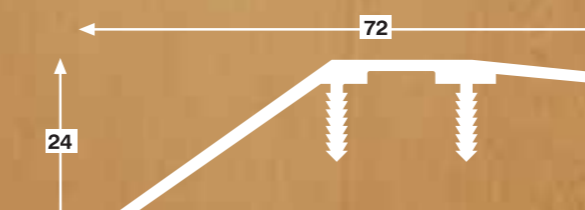

FR3 22 RAMP

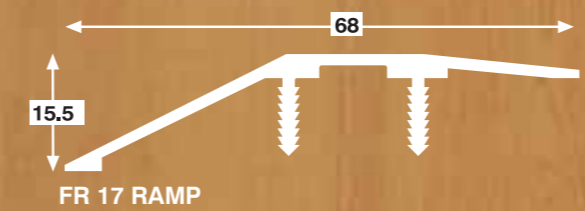

FR 17 RAMP
FR 22 RAMP

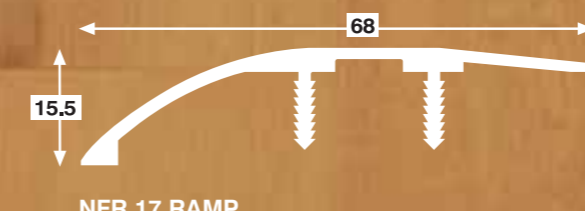


NFR 17 RAMP
NFR 22 RAMP




CONTRACT 17 BASE




CONTRACT 22 BASE

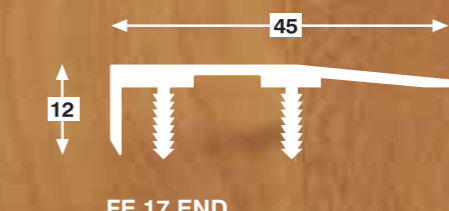

FE 17 END
FE 22 END

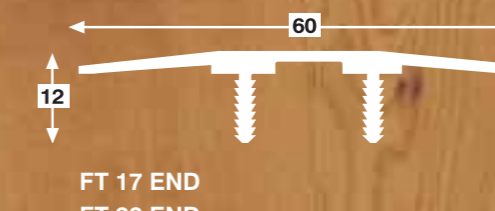


FT 17 END
FT 22 END

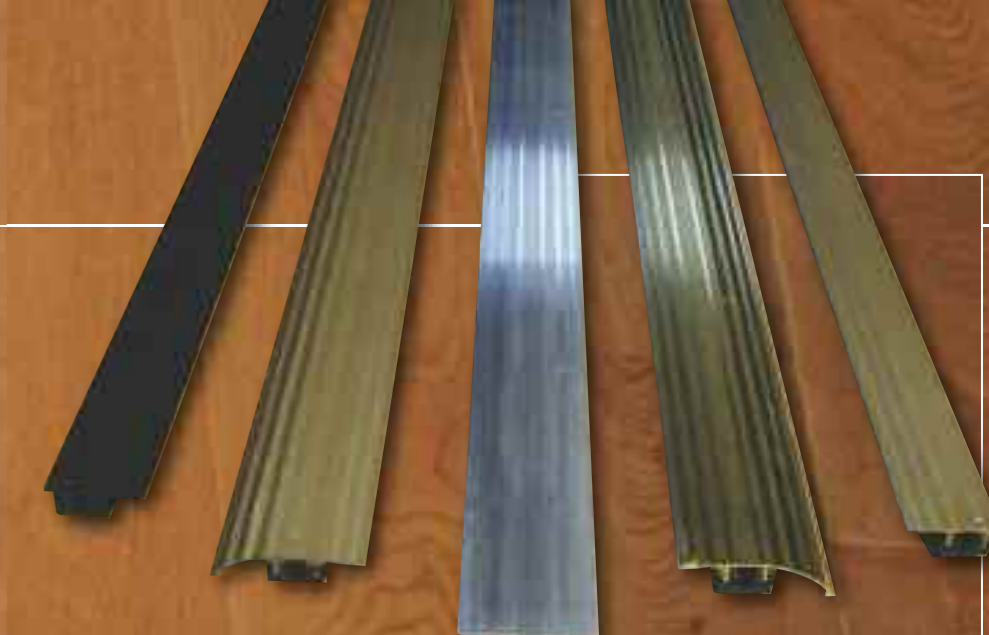

MATERIAL	TOP SECTION Aluminium 6063 T6
	BASE SECTION Rigid uPVC
FINISHES	Mill Aluminium or 4 Anodised Finishes
TRAFFIC	Medium to Heavy Contract
FIXING	Screw Fix Base, Tap In Top Section
LENGTHS	990mm & 3000mm

Profiles and bases shown actual size



frontier cover plate

Frontier Cover Plate Profiles are an addition to the ever increasing range of accessories designed for use in the sports flooring market. Also suited to contract use, the Cover Plate sections are specifically designed to cover large gaps created through door ways or room partitions. Available in 3 sizes, Cover Plate can be off set drilled to be screw fixed one side and still allow movement under the other. The profile is also slightly cranked to enable a flush fit even on uneven surfaces and differing finished floor heights.



Standard finishes
Frontier Cover Plate is available in a range of Aluminium finishes which include: Mill Finish, Etch Brass, Etch Bronze and Etch Silver. Currently only Mill Finish is stocked. Other finishes to order.

Colour Matching
Samples of all profiles, inserts, colours and finishes are available free of charge.




Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Cover Plate
Frontier Cover Plate is specified by name, profile size, length and finish


Packaging and Supply
Frontier Cover Plate is available in various lengths and quantities. Lengths include 1000mm, 2000mm & 3000mm. Short lengths (1000mm & 2000mm) are sold in packs of 12, long lengths (3000mm) are sold in packs of 6.

Fixing and Maintenance
Frontier Cover Plate requires screw fixing to a solid base on at least one edge. We can supply off-set drilled to any specification. It is also possible to fix in combination with a high grab PU adhesive.

profiles

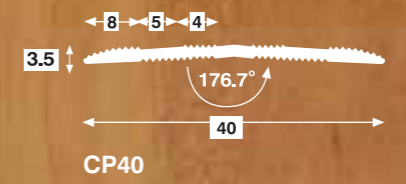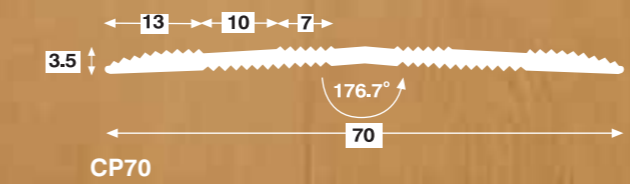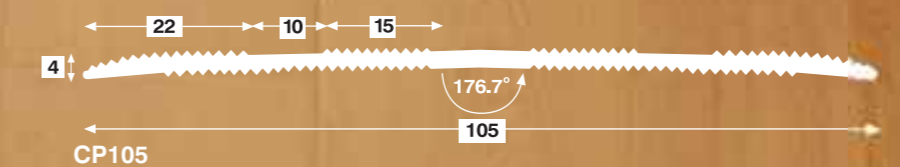

drilling options

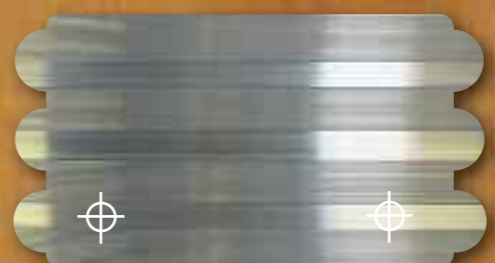

MATERIAL	Aluminium 6063 T6
FINISHES	Mill or Anodised to Order
TRAFFIC	Medium to Heavy Contract
FIXING	High Grab Adhesive & CSK Screwed
LENGTHS	3000mm, 2000mm, 1000mm

Profiles and bases shown actual size



frontier duo

Frontier Duo nosing profiles have been manufactured for use with wood, wood laminate or ceramic materials on stairs.

Duo is designed to provide a neat, attractive and anti-slip finish to the edge of steps. The Aluminium anodised sections can also be used to accentuate the edge of stairs in commercial or residential buildings.

Duo has space for the stair material to be inserted into the nose of the profile. The thickness of the material being used will determine which profile is required.

Standard finishes

Duo stair profiles are available in the following anodised finishes: Mill Finish, Sim Brass, Etch Brass, Etch Dark Bronze and Etch Silver.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge.

Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Duo

Frontier Duo profiles should be specified by name, profile section and finish.

Packaging and Supply

All profiles are supplied complete pre-drilled. All finishes are available in either 1000mm, 1400mm, 2000mm and 3000mm lengths.


As standard all items are individually wrapped to protect from scratching.

Fixing and Maintenance

Fixing diagrams and instructions are given in the rear of our brochure. (Page 32-33)

Alternatively please call the sales office.

profiles

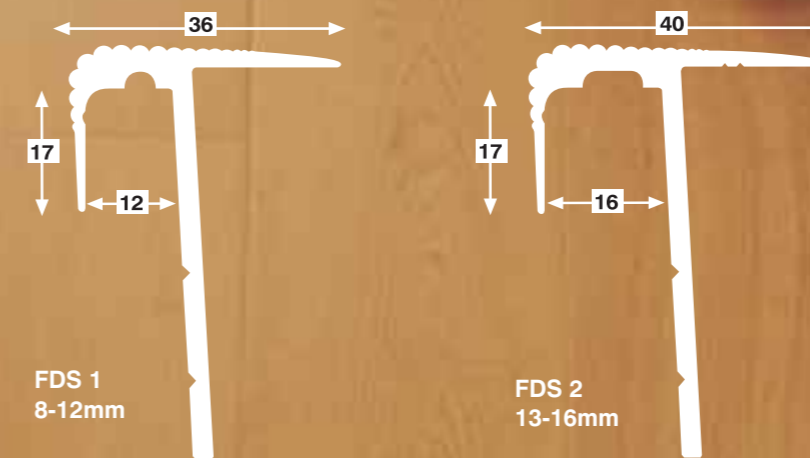

MATERIAL	Aluminium 6063 T6
FINISHES	Choice of 6 Anodised
GAUGE	8mm < 22mm
TRAFFIC	Medium/Heavy Contract and Domestic Use
FIXING	Glued & Screwed
LENGTHS	1000mm, 1400mm, 2000mm and 3000mm standard lengths

Profiles and bases shown actual size



frontier woodline

Frontier Woodline is a range of pre-finished hardwood trims developed for use with solid wood, wood veneers and parquet flooring with a finished floor thickness of between 10mm and 22mm. All Woodline profiles consist of a hardwood top section and a uPVC base section. The top section locates securely into the serrations on the base allowing the profile to be tapped down to the height of the finished floor. The hardwood top profiles are available in a variety of natural wood finishes, stains and lacquers. A range of hardwood stairnosings, quadrant, scotia, pipe covers and skirting are also available to complement the Woodline range.

Standard finishes

Woodline profiles are available in a huge range of hardwood finishes which include: Ash, Beech, Cherry, Iroko, Light Oak, Mahogany (Stained Sapele), Maple, Red Oak, Sapele, Steamed Beech, Unfinished Oak, Unfinished Sapele and Walnut.

Special Finishes

An addition to the standard hardwoods we have a range of stained finishes: Armagnac, African Oak, Antique Oak, Auburn, Bleached, Carbon, Cherry Oak, Cognac, English Oak, Kempas (Stained Sapele), Old Oak, Smoked Oak, Residence White, Chepstow Oak, TeKa Golden Oak and TeKa Smoked Oak

Other hardwood species are available to special order with price on application, these include: Birch, Jatoba, Merbau and Wenge.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge. Please note, samples may be too small to show the full colour variations of a natural product so are only representative of the finish.

Please contact our sales office for further details Tel +44 (0) 1673 844424



Specifying Woodline

Woodline profiles are specified by the name, profile shape, base height, length and finish. Selecting the correct base section is determined by the finished floor height:

A finished floor height of 10mm – 13mm will require the low base (13mm)

A finished floor height of 15mm – 18mm will require the medium base (18mm)

A finished floor height of 18mm – 22mm will require the high base (22mm).


Packaging and Supply

All profiles are supplied complete with selected top section and pre-drilled base. All finishes are available in either 990mm or 3000mm lengths. Standard distributor packaging consists of 12 x 990mm and/or 6 x 3000mm lengths. As standard all items are pre-sealed in 500uM gauge layflat, however, numerous packaging, labeling and barcoding options are available on request.

Fixing and Maintenance

Frontier Woodline base section is fixed using 31mm counter sunk wood screws and a proprietary gap fill adhesive. The top section is then tapped into the fixed base with a rubber mallet.

profiles

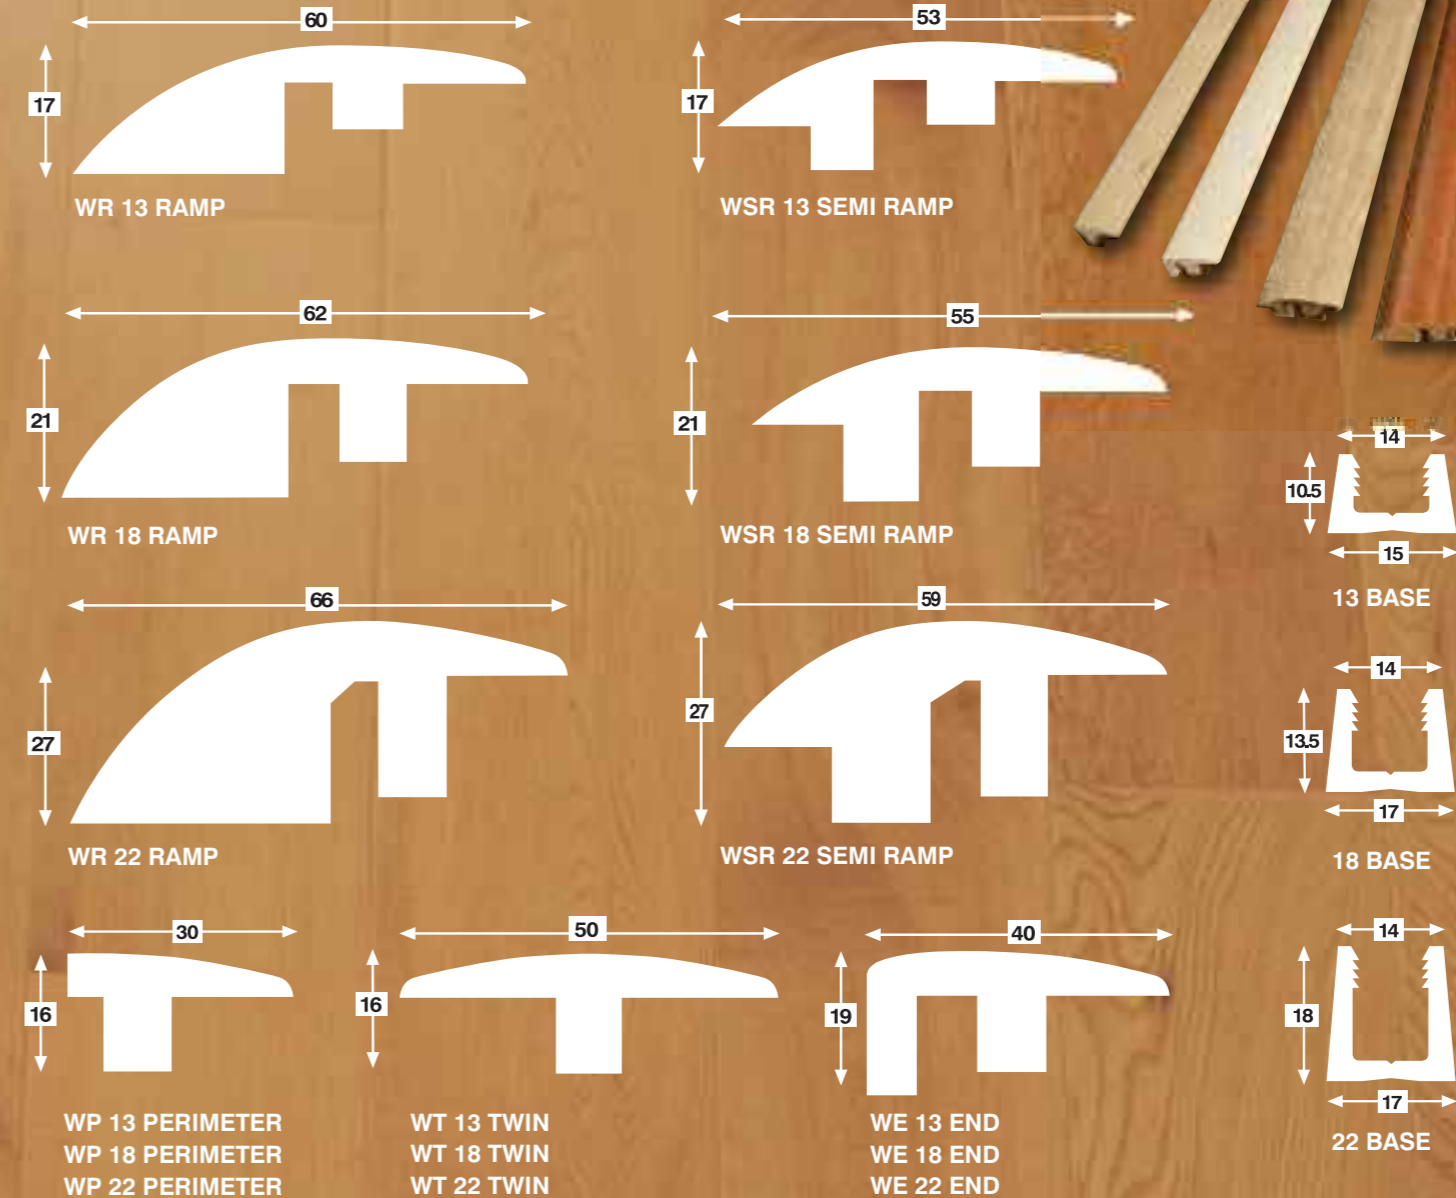

MATERIAL	TOP SECTION Hardwood
	BASE SECTION Rigid uPVC
FINISHES	30 Hardwoods and Stains
GAUGE	10mm < 22mm
TRAFFIC	Medium Contract and Domestic
FIXING	Screw Fix Base, Tap In Top Section
LENGTHS	990mm and 3000mm

Profiles and bases shown actual size



frontier single part woodline

Frontier Single Part Woodline is a range of pre-finished hardwood trims developed for use with solid wood, wood veneers and parquet flooring. Available in three different thicknesses, 15mm, 18mm or 22mm, Single Part Woodline profiles can be used with a variety of manufacturers' boards. The section is fixed by positioning and then gluing using a high grab adhesive. The hardwood profiles are available in a variety of natural wood finishes, stains and lacquers. A range of height adjustable Woodline profiles, hardwood stairnosings, quadrant, scotia, pipe covers and skirting are also available to complement the Single Part Woodline range.

Standard finishes

Single Part Woodline is available in a range of hardwood finishes which include: Ash, Beech, Cherry, Iroko, Light Oak, Mahogany (Stained Sapele), Maple, Red Oak, Sapele, Steamed Beech, Unfinished Oak, Unfinished Sapele and Walnut.

Special Finishes

In addition to the standard hardwoods we have a range of stained finishes: Armagnac, African Oak, Antique Oak, Auburn, Bleached, Carbon, Cherry Oak, Cognac, English Oak, Kempas (Stained Sapele), Old Oak and Smoked Oak.

Other hardwood species are available to order, with price on application, these include: Birch, Jatoba, Merbau and Wenge.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge. Please note, samples may be too small to show the full colour variations of a natural product so are only representative of the finish.

Please contact our sales office for further details Tel +44 (0) 1673 844424



Specifying Single Part Woodline

Woodline profiles are specified by the name, profile shape, length and finish. Selecting the correct section is determined by the floor height:

A floor height of approx. 15mm will require the 15mm Sections

A floor height of approx. 18mm will require the 18mm Sections

A floor height of approx. 22mm will require the 22mm Sections







Packaging and Supply

All profiles are supplied complete with selected top section. Finishes are available in either 990mm or 2900mm lengths. Standard distributor packaging consists of 12 x 990mm and/or 6 x 2900mm lengths. As standard all items are pre-sealed in 500uM gauge layflat, however, numerous packaging, labeling and barcoding options are available on request.

Fixing and Maintenance

Frontier Single Part Woodline profiles are fixed by using a high grab adhesive. Once positioned and glued, the profile can be secured by tapping down with a rubber mallet.

profiles

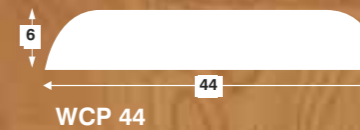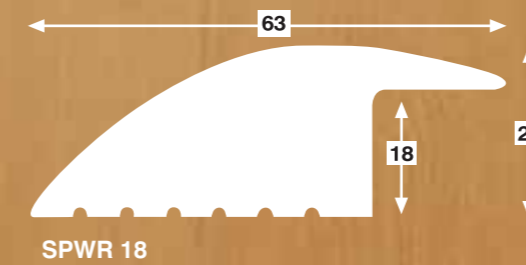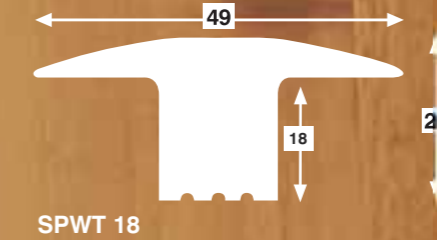

MATERIAL	Hardwood
FINISHES	30 Hardwoods and Stains
TRAFFIC	Medium Contract and Domestic
FIXING	High Grab Adhesive to Floor
LENGTHS	990mm and 2900mm

Profiles and bases shown actual size





frontier carpetline

Frontier Carpetline is a new range designed specifically with the carpet market in mind. Manufactured from the same finest grade raw materials as the Woodline range, Carpetline combines a stunning visual finish with the structural strength required for wood profiles to be used with carpet. Reinforced rebated edges allow carpet products to sit neatly underneath the lip of the trim hiding any unsightly edges or frays, whilst ensuring there is no danger of cracks, splits or breaks.

Standard finishes

Frontier Carpetline is available in Cognac, Light Oak and Mahogany. Other finishes are available to order.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge. Please note, samples may be too small to show the full colour variations of a natural product so are only representative of the finish

Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Carpetline

Frontier Carpetline is specified by name, profile shape, length and finish.




Packaging and Supply

All profiles are supplied complete. All finishes are available in cut lengths of 960mm and 2900mm. Standard distributor packaging consists of 20 x 960mm and/or 10 x 2900mm lengths. As standard all items are individually pre-sealed in 500uM gauge layflat, however, numerous packaging, labeling and barcoding options are available on request. Please contact our sales office for details.

Fixing and Maintenance

Frontier Carpetline is fixed using a combination of PU adhesive and screw fixing. Carpetline has a serrated underneath to increase grab on the substrate floor. In high traffic areas, screwing and plugging is advised.

profiles

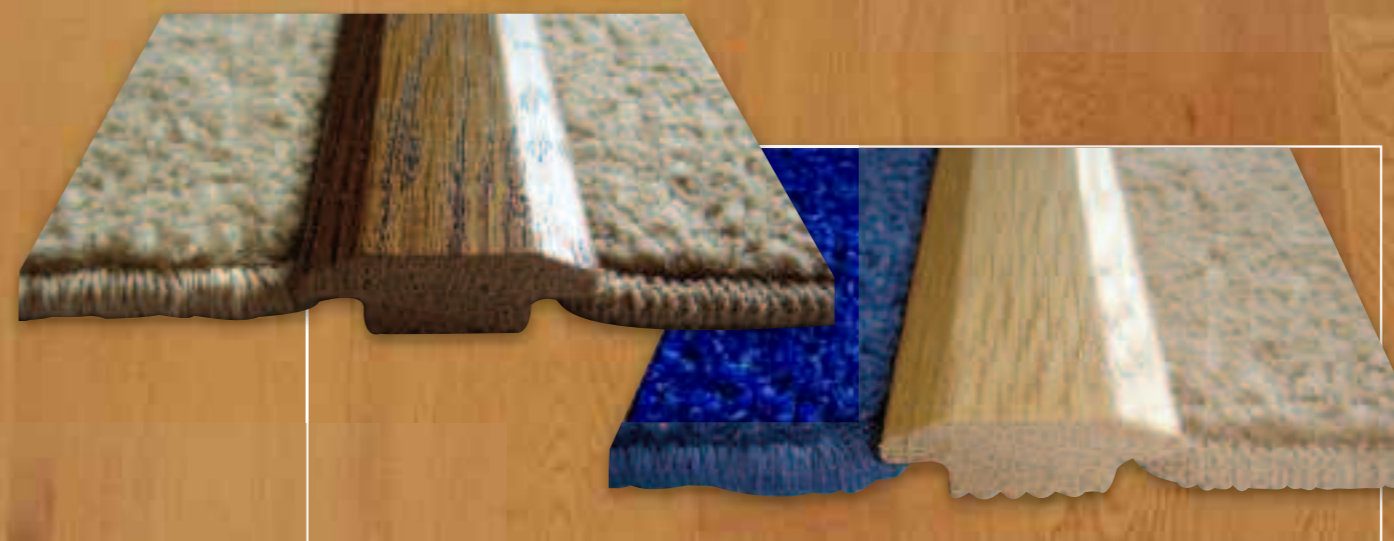

MATERIAL	Hardwood
FINISHES	Cognac, Light Oak & Mahogany
GAUGE	8mm < 22mm
TRAFFIC	Medium Contract and Domestic
FIXING	High Grab Adhesive and or CSK Screwed
LENGTHS	2900mm and 960mm

Profiles and bases shown actual size



frontier woodline stairnosings

Frontier Woodline Stairnosings provide a safe, attractive and practical edge for solid wood, wood veneer and parquet flooring. With standard thicknesses of 10mm, 14mm and 19mm, each section can be packed to accommodate all finished floor heights and types. The three back options on the profiles offer a Butted finish, an Overlapped finish or a Tongue and Groove finish (bespoke to the board being used). For installations that require anti-slip or high contrast finishes, Parallel offers a range of sections with uPVC inserts in four standard colours (other colours available to special order). All sections are machined from solid hardwood to provide a durable edge which finishes and enhances all areas.

Standard finishes

Woodline Stairnosings are available in an extensive range of hardwood finishes which include: Ash, Beech, Cherry, Iroko, Light Oak, Mahogany (Stained Sapele), Maple, Red Oak, Sapele, Steamed Beech, Unfinished Oak, Unfinished Sapele and Walnut.

Special Finishes

An addition to the standard hardwoods we have a range of stained finishes: Armagnac, African Oak, Antique Oak, Auburn, Bleached, Carbon, Cherry Oak, Cognac, English Oak, Kempas (Stained Sapele), Old Oak, Smoked Oak, Residence White, Chepstow Oak, Teka Golden Oak and Teka Smoked Oak

Other hardwood species are available to special order with price on application, these include: Birch, Jatoba, Merbau and Wenge.

Insert Finishes

Anti-slip inserts are available in four standard colours: Peat (Brown), Black, Grey and White.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge. Please note, samples may be too small to show the full colour variations of a natural product so are only representative of the finish.

Specifying Woodline Stairnosings

Woodline Stairnosing profiles are specified by the name, profile shape, length and finish.


Packaging and Supply

All profiles are supplied complete (with inserts where applicable). Nosing standard lengths are 1000mm, 1400mm, 2000mm and 3000mm. Short lengths (1000mm and 1400mm) are supplied in full boxes of 12 pieces. Long lengths (2000mm and 3000mm) are supplied in full boxes of 6 pieces.

Fixing and Maintenance


Woodline Stairnosings are fixed using a combination of: high grab adhesive and countersunk wood screws. It is suggested that the screws comply with building regulations with regards to their length. Plugging the top section provides the neatest way of finishing when not using an insert.

profiles

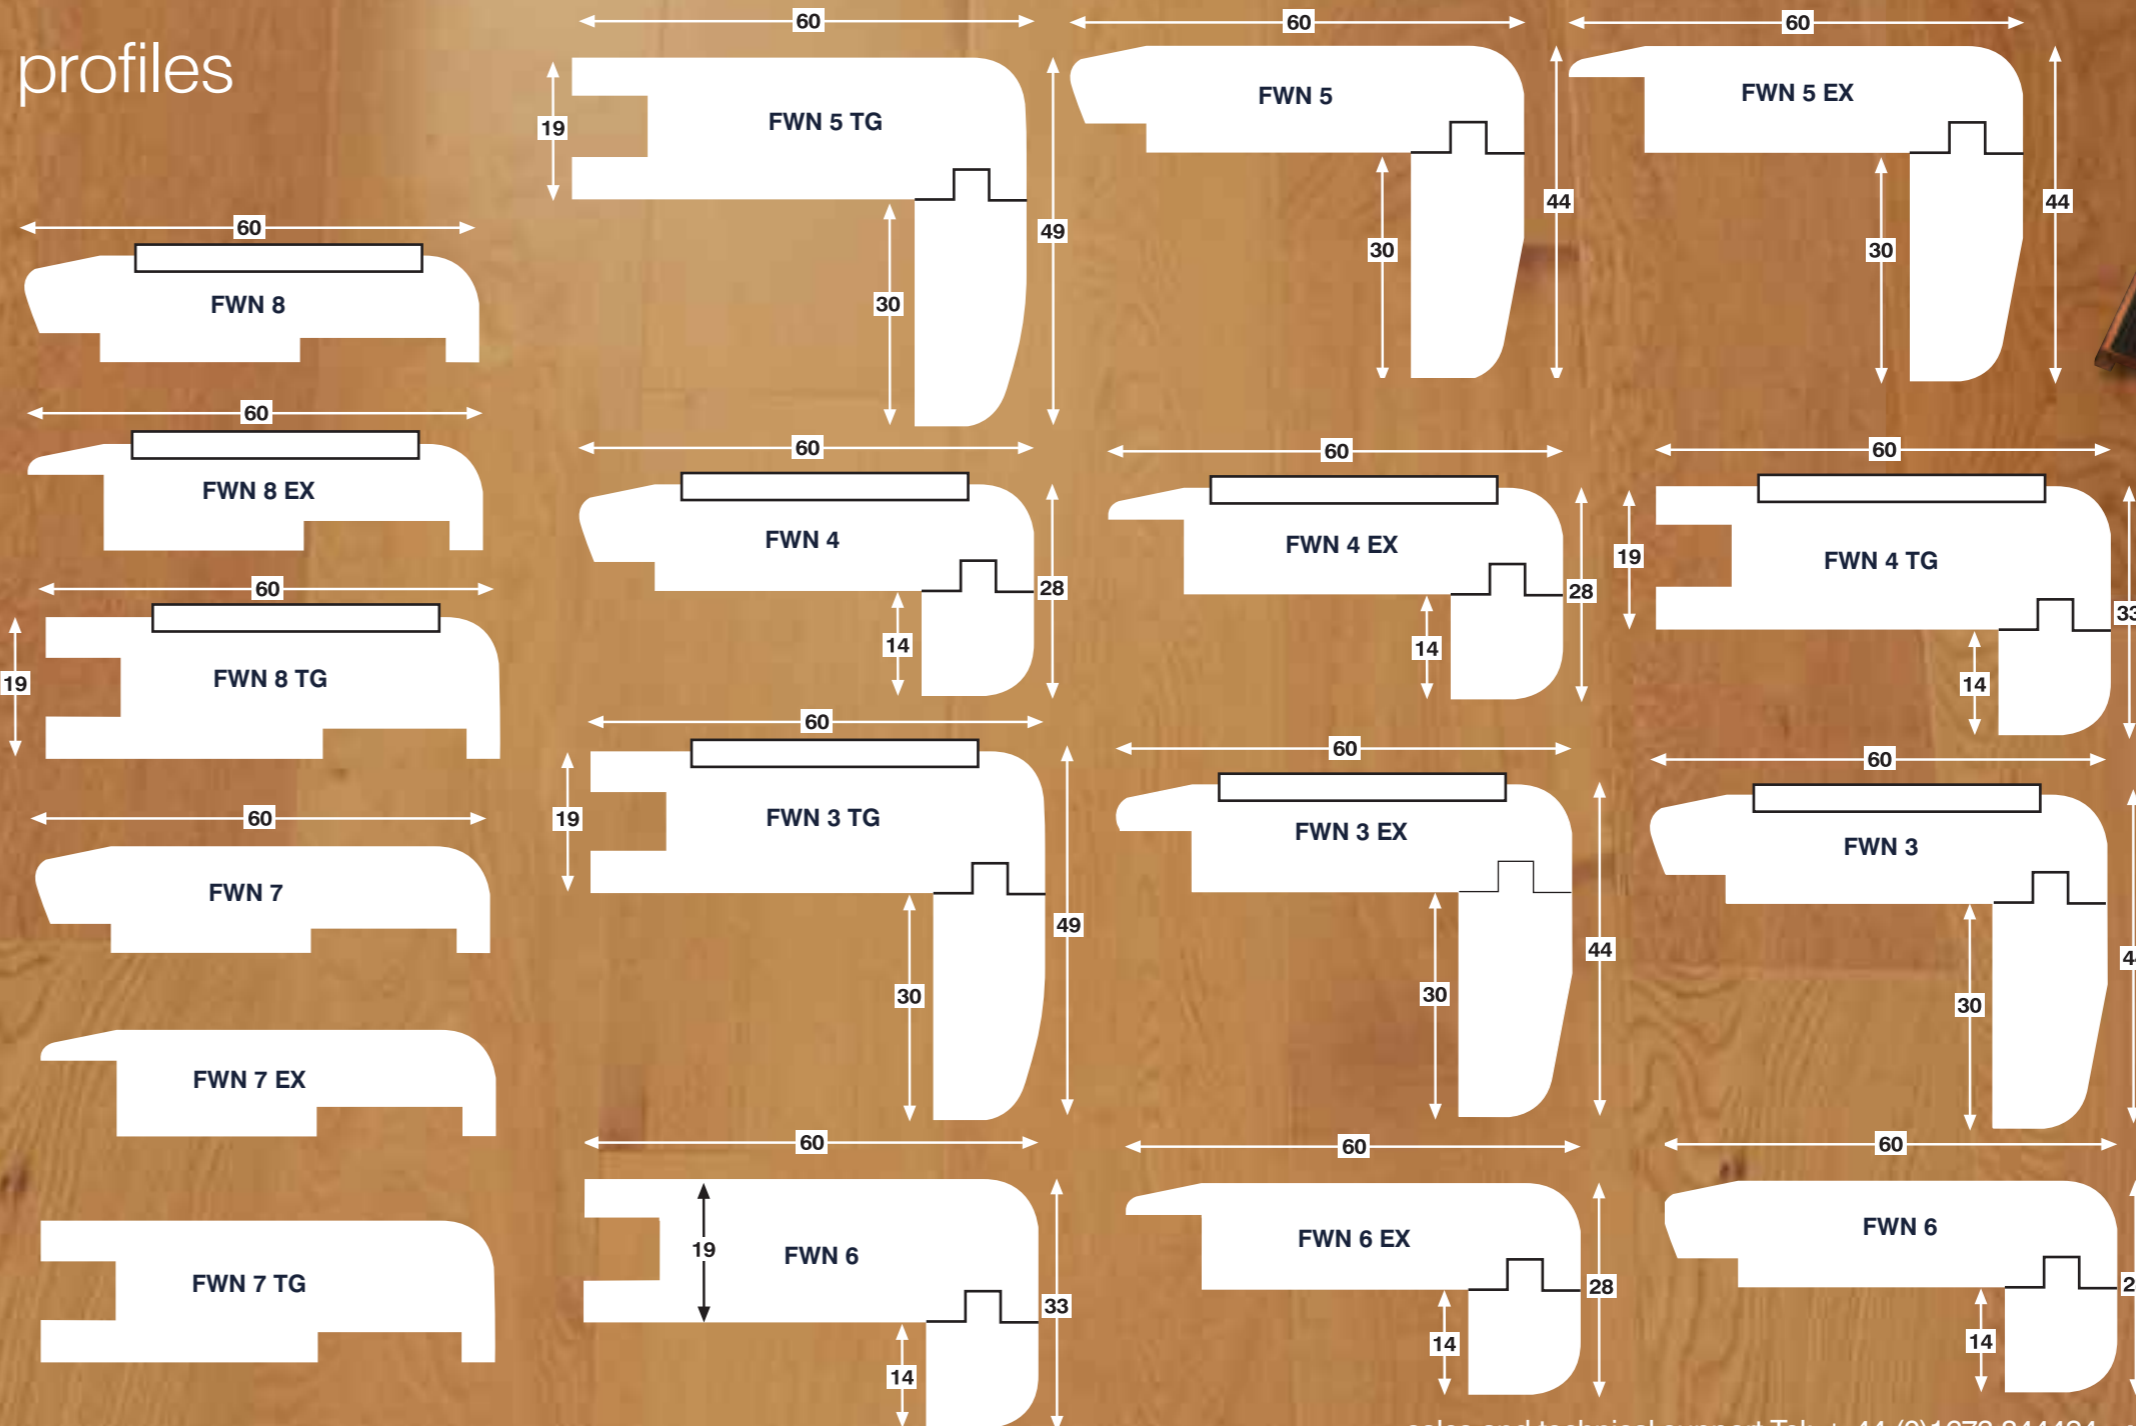

MATERIAL	NOSING Hardwood
	INSERT Anti - Slip PVC
FINISHES	NOSING 30 Hardwoods and Stains
	INSERT 4 Complementary Colours
TRAFFIC	Medium Contract and Domestic
FIXING	Screwed, Glued and Plugged
LENGTHS	1000mm, 1400mm, 2000mm and 3000mm

Profiles and bases shown actual size



hardwood quadrant, scotia, skirting architrave

To complement the Woodline profiles and nosing sections, Parallel offers an extensive range of Hardwood Quadrant, Scotia, Skirting and Architrave. Produced from the same hardwood timbers as the Woodline range, these finishing products are of the quality only assured with Parallel.

Standard finishes

Quadrant & Scotia, Skirting and Architrave are available in an extensive range of hardwood finishes which include: Ash, Beech, Cherry, Iroko, Light Oak, Mahogany (Stained Sapele), Maple, Red Oak, Sapele, Steamed Beech, Unfinished Oak, Unfinished Sapele and Walnut.

Special Finishes

An addition to the standard hardwoods we have a range of stained finishes: Armagnac, African Oak, Antique Oak, Auburn, Bleached, Carbon, Cherry Oak, Cognac, English Oak, Kempas (Stained Sapele), Old Oak, Smoked Oak, Residence White, Chepstow Oak, Teka Golden Oak and Teka Smoked Oak.

Other hardwood species are available to special order with price on application, these include: Birch, Jatoba, Merbau and Wenge.

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge. Please note, samples may be too small to show the full colour variations of a natural product so are only representative of the finish

Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Woodline Extras

Woodline Extras are specified by the name, profile shape, length and finish.

Packaging and Supply

Hardwood Quadrant and Scotia is distributed loose in tubes of 20 pieces. Each length is 3000mm.

Hardwood Skirting is wrapped individually and sold by the length. Standard lengths vary from 2700mm to 3000mm.



Hardwood Architrave is wrapped individually and sold in door sets. One door set consists of 2 x 2134mm lengths and 1 x 1000mm length.

Fixing and Maintenance

Hardwood Quadrant & Scotia can either be pinned with small wood pins or glued with a high grab adhesive.

Hardwood Skirting and Architrave is fixed by gluing, screwing and then plugging the countersunk holes created. Remember to take into account mitres when measuring and cutting.

profiles

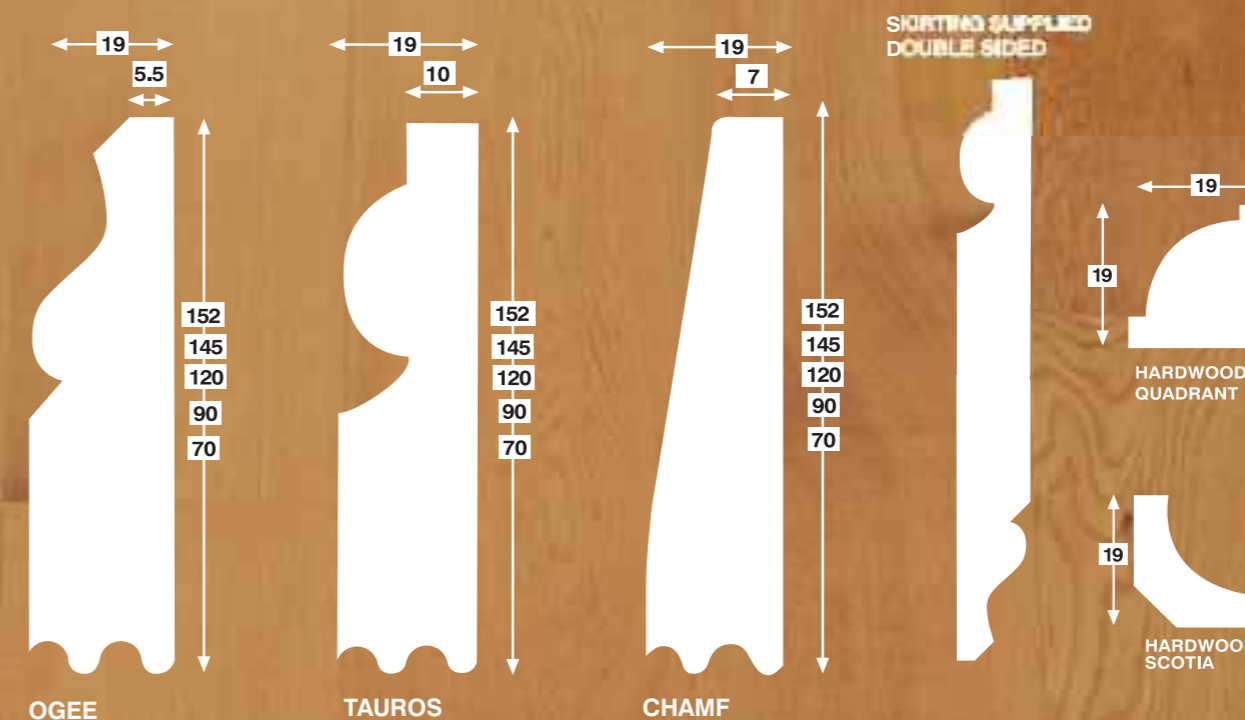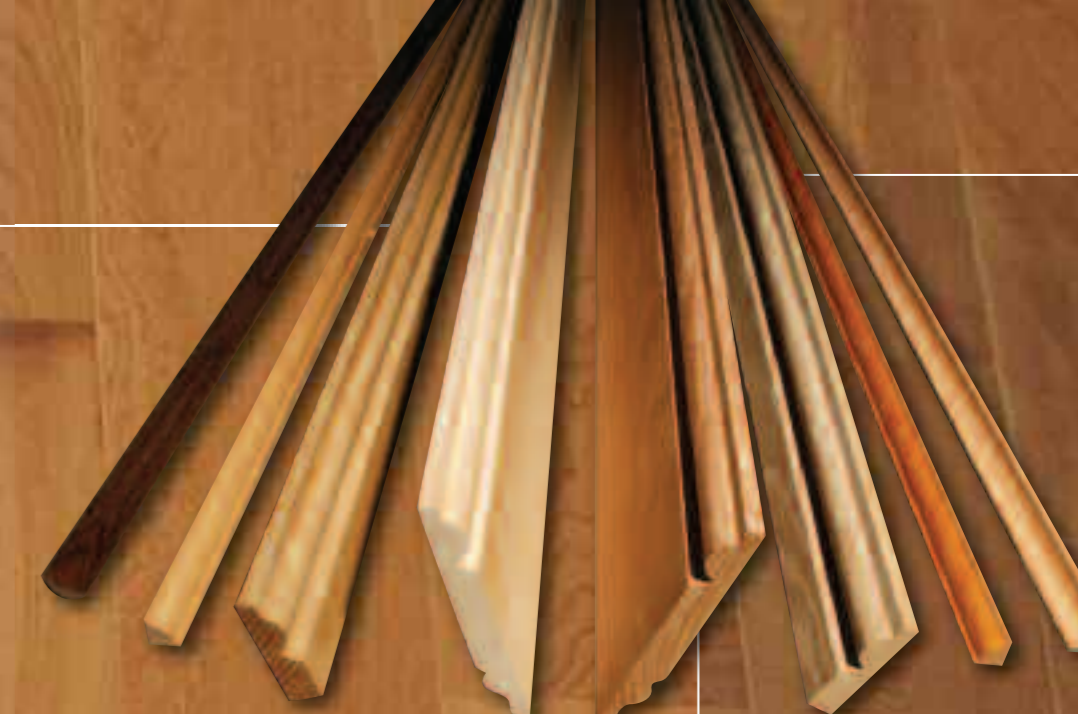

MATERIAL	Hardwood
FINISHES	30 Hardwoods and Stains
TRAFFIC	Medium Contract and Domestic
FIXING	High Grab Adhesive & CSK Screwed
LENGTHS	HWSC & QD 3000mm SK 2700mm - 3000mm AK 2200mm or 1000mm

Profiles and bases shown actual size



frontier combistar

Combistar is designed for use with an extensive range of surfaces including Laminate, Cork, Ceramics and Engineered Wood floors.

The Combistar section provides an answer for the trimming and finishing of equal and unequal floor levels with a single profile.

A unique tilt and turn base system allows the profile to not only adjust to floor heights of 7mm through to 21mm, but also tilt along the profile length producing either a flat 'T' section or a Ramp down to a maximum difference of 25mm

frontier clipstar

The Clipstar system provides a fast and neat way of fixing skirting over a newly laid laminate or engineered wood floor.

Manufactured using high quality spruce core with a real wood veneer finish. The patent applied push and press system ensures that the skirting tracks along even the most irregular of walls, reducing unsightly spaces whilst covering the expansion gap between floor and wall. The unique clips also allow for cables and speaker wires to be secured behind the skirting out of sight.

The sprung clips also enable removal and re-fitting, making Clipstar ideal for repair or redecoration.

Standard finishes

Combistar is available in numerous solid wood veneers, including Beech, Bamboo (Natural), Bamboo (Coffee), Cherry, Light Oak, Unfinished Oak, Maple, Merbau and Walnut. In addition to these standard finishes, we have over 60 other veneers encompassing most wood species and cork finishes to order.

Please contact our sales office for further details Tel +44 (0) 1673 844424

Standard finishes

Clipstar is currently available in Light Oak and Unfinished Light Oak. However, as with the Combistar profiles, up to 60 different veneer finishes are available to special order.

Specifying Clipstar

Clipstar skirting is specified by name, profile shape, length and finish. The clips are ordered separately in boxes of 50 (enough for 25M of skirting).

Packaging and Supply

Clipstar is available in 2500mm lengths and is distributed in packs of 10 pieces. One pack of skirting requires one box of clips (50 per box) which are sold separately.

Packaging and Supply


Each individual profile is retail packed with Veneer top section, base, clips and screws. Combistar is sold in complete boxes of 10 pieces in either 1000mm or 2400mm lengths.

Fixing and Maintenance

The Clipstar section is simple to fix and involves a three step process.

1. Screw fix the clips to the wall with the bottom plate resting on the flooring.
2. Run any wires or cables behind the forward section of the clip (optional).
3. Slide the skirting onto the clips from above. Push firmly downwards for a secure fit.


profiles combistar

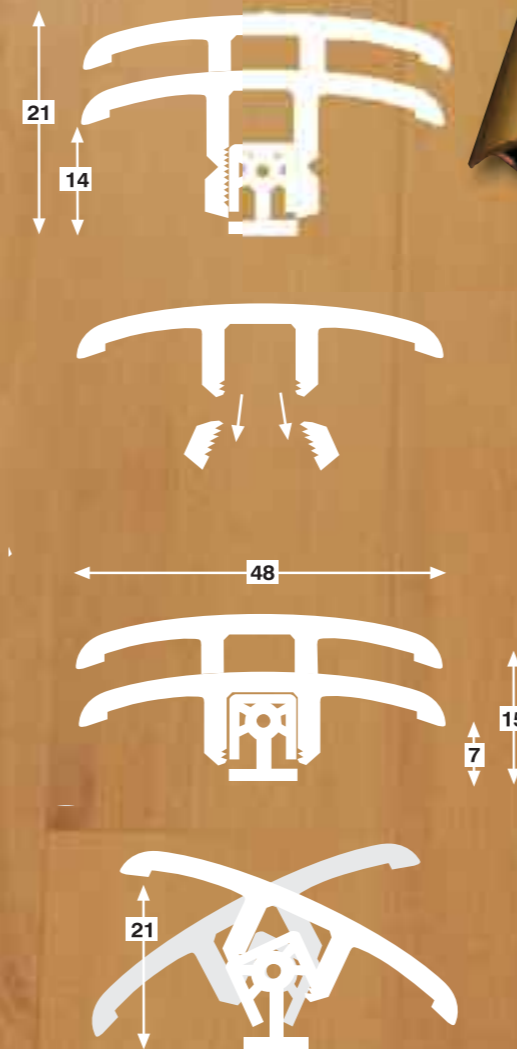

MATERIAL	TOP SECTION Liquid Wood Core With Veneer Finish
	BASE SECTION Rigid uPVC
FINISHES	60 Real Wood Veneers
TRAFFIC	Medium Contract and Domestic
FIXING	Screw Fix Base, Clip On Top Section
LENGTHS	1000mm and 2400mm

Profiles and bases shown actual size

profiles clipstar

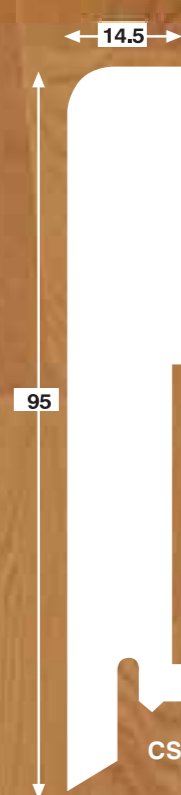

MATERIAL	Finger jointed Spruce core with UV resistant lacquered real wood veneer.
	Sprung clips of corrosion proofed Steel
FINISHES	Oak
TRAFFIC	Inside use all areas
FIXING	Screw clip and push fit
LENGTHS	2500mm

Profiles and bases shown actual size



frontier sports

Frontier Sports Floor Profiles are an ever increasing range of accessories designed for use in the sports flooring market. Designed and manufactured to allow natural movement in the floor, coverage of an expansion gap of either up to 38mm (Sports Scotia) or 60mm (Sports Skirting) around the perimeter of a sports arena can be catered for.

In addition to the skirting pieces, a 28mm drop ramp section is available to provide a smooth transition from the sports floor to any other surface. Thus, removing any potential trip hazards and/or unsightly edges.

Standard finishes

Frontier Sports Floor is available in a range of hardwood finishes which include: Ash, Beech, Light Oak, Maple and Steamed Beech.

Special Finishes

In addition to the standard hardwoods, we have a range of stained finishes: Armagnac, African Oak, Antique Oak, Auburn, Bleached, Carbon, Cherry Oak, Cognac, English Oak, Old Oak and Smoked Oak.

Other Hardwood species are available to order, with price on application: Birch, Cherry, Iroko, Jatoba, Mahogany (Stained Sapele), Red Oak, Sapele, Steamed Beech, Unfinished Oak, Unfinished Sapele and Walnut.



Courtesy of Reflex Sports Ltd



Courtesy of Reflex Sports Ltd

Colour Matching

Samples of all profiles, inserts, colours and finishes are available free of charge. Please note, samples may be too small to show the full colour variations of a natural product so are only representative of the finish.

Please contact our sales office for further details Tel +44 (0) 1673 844424

Specifying Frontier Sports

Sports Floor profiles are specified by the name, profile shape, length and finish.


Packaging and Supply

All Sports Floor profiles are pre packed for protection. Full boxes consist of 20 pieces.

Fixing and Maintenance















Frontier Sports Floor profiles are fixed by a combination of pinning and application of a high grab adhesive to the back.

profiles

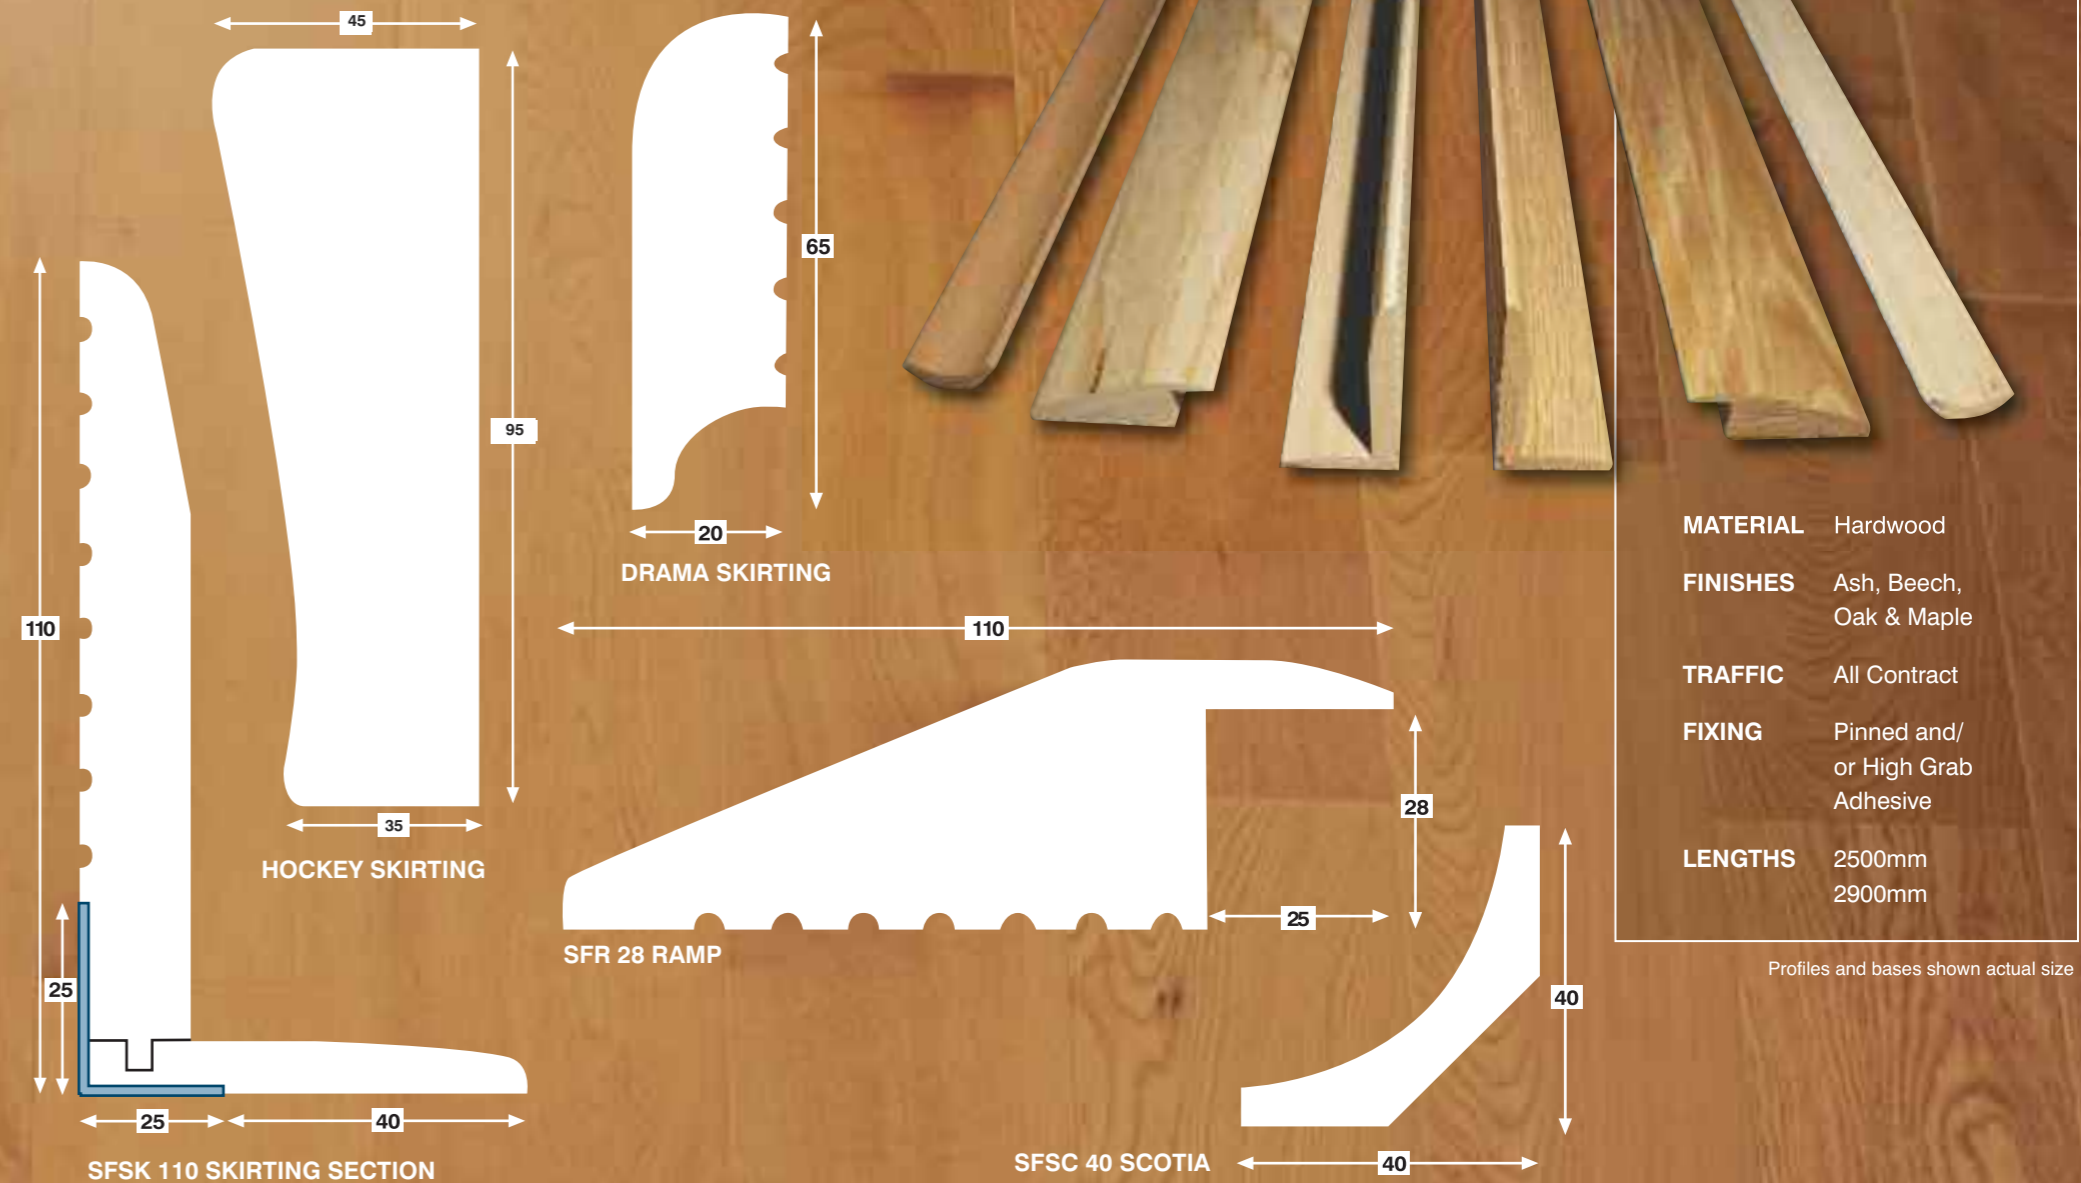

MATERIAL	Hardwood
FINISHES	Ash, Beech, Oak & Maple
TRAFFIC	All Contract
FIXING	Pinned and/or High Grab Adhesive
LENGTHS	2500mm 2900mm

Profiles and bases shown actual size

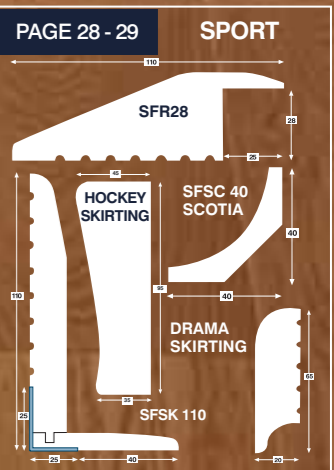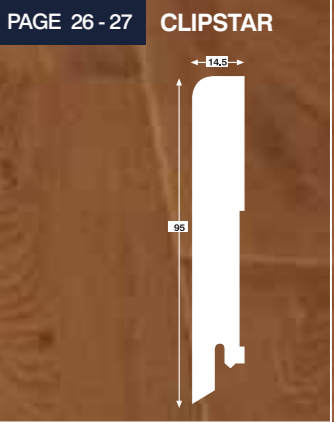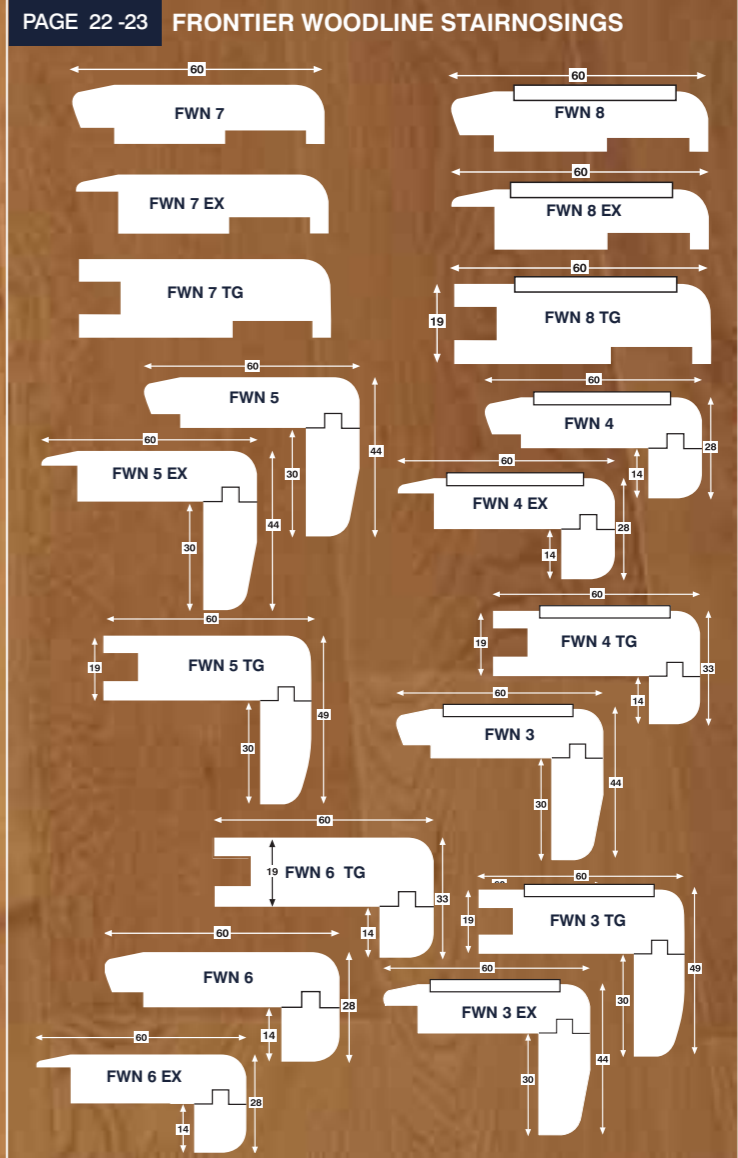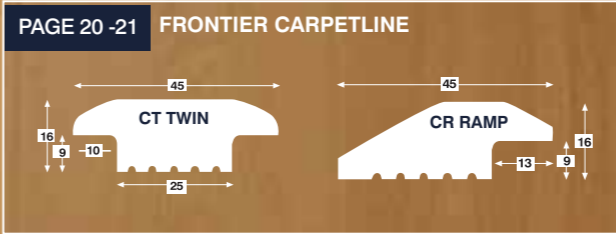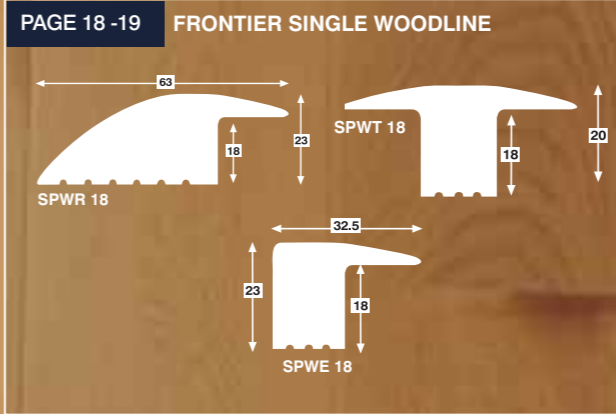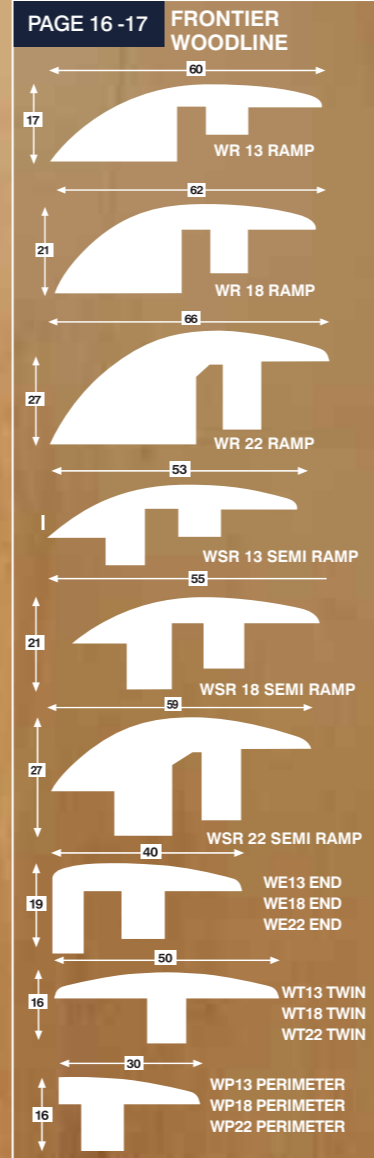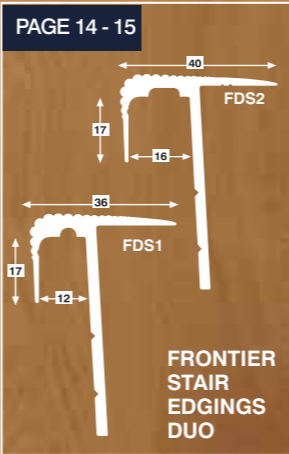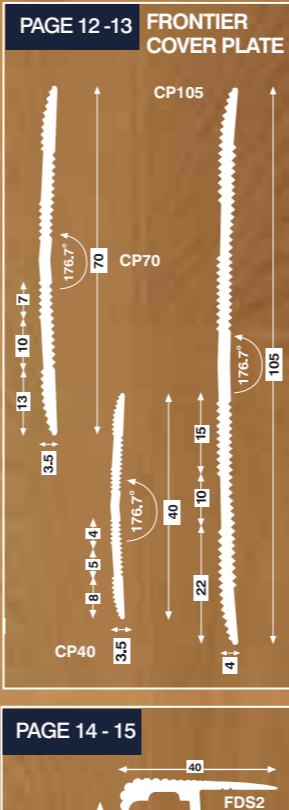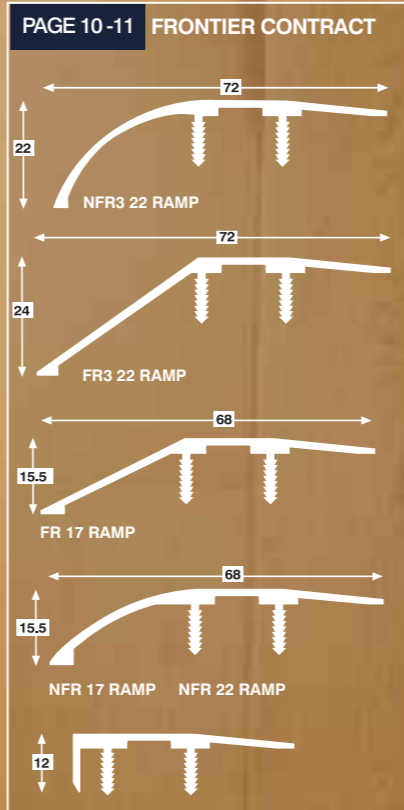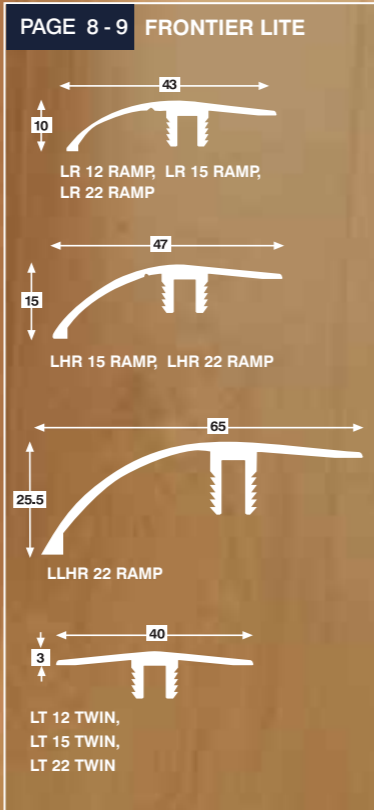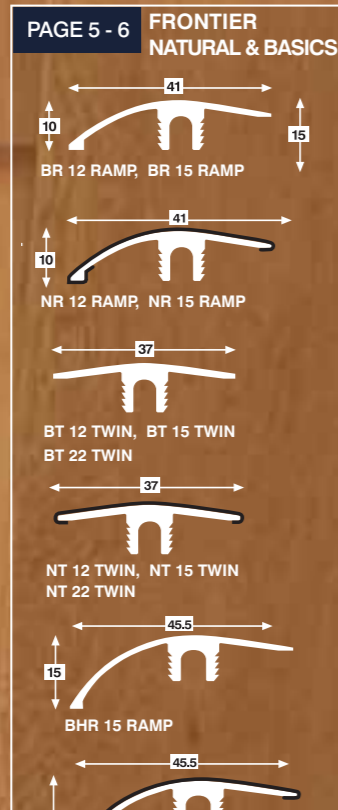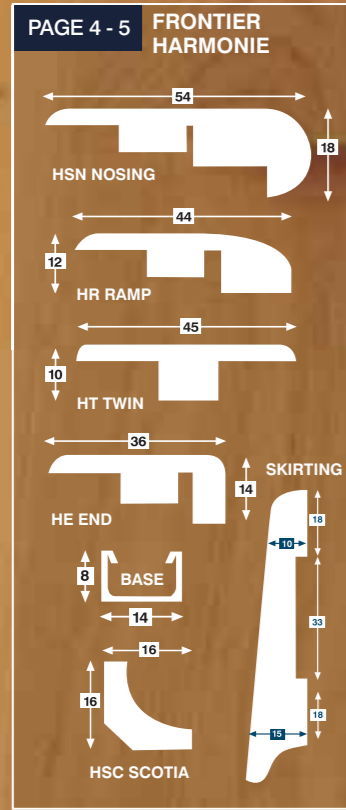

profile selection

The wide and varied ranges of wood, wood veneers, laminates underlayments and their associated thicknesses available on the market today can make the selection of the appropriate trims difficult. Therefore we have detailed above a number of points which we trust will help you our customer in selecting the appropriate Parallel product for your particular application.

Where do I need to use trims? As a general rule when fitting a "wood type" floor an expansion gap should be left all the way around the room or area. The edge of the flooring should not come into contact with any walls, door casings, posts, supports, or fire surrounds. Where flooring is being continued from one room to another then a physical gap should be left to allow for movement of the floor between the two areas.

In some cases where large areas are laid the flooring manufacturer may recommend a split in the flooring to accommodate expansion as well as around the edges and doors. (Your flooring manufacturer's will be able to advise of the required expansion gap for a particular wood species, type and area). In order to decide which is the correct profile from our range you will need to be able to answer a few questions.

What is the finished floor thickness including the underlay? The finished floor thickness includes the underlay to be used, both the floor thickness and the underlay will vary according to manufacturer. The full Parallel product range enables the trimming of finished wood and laminate floor thicknesses from 8mm to 22mm. The maximum and minimum use for each of the ranges is detailed on the relevant product page and in the material specifications

How much expansion is required on the floor? Being natural products wood engineered and even laminate flooring "breathes" or expands and contracts according to the relative humidity of the area or adjoining areas in which it is fitted. Please check your flooring manufacturers fitting instructions for information of expansion/contraction allowances. This will assist you in calculating the number and type of trims required. All of the Parallel product ranges are designed to allow for the expansion and contraction of woods and laminates (see fitting instructions on page 32).

What is the area of use? At the top left of each of our product range pages and in the material specifications we have detailed the recommended use i.e.: Domestic/Light Contract, Contract and Heavy Contract. Please check that the product you are selecting is suitable for use in the area in which it is to be fitted.



site preparation fitting, maintenance and cleaning

Site preparation

Frontier Floor Trims


The subfloor onto which the trim is to be fixed should be level and free from major irregularities. The surface should be dry and free from dust or other contamination.

Frontier Stair Edgings

Any step damage should be repaired to create a smooth surface and sufficient time allowed for any repair to cure before the step edge profile is fitted. It should be noted that stair edge profiles are not designed to be self supporting and any gaps left between the step and the profile will reduce the profile life and could result in failure of the profile when stepped on and create a trip hazard.

Frontier Quadrants and Scotia's

When quadrants and Scotia's are to be fitted onto existing skirting boards, any loose paint, wood stains or other particles should be removed prior to fitting in order that a good joint is achieved between the quadrant/Scotia and skirting. Scotia and quadrants should always be fixed to the skirting or wall only and not to the flooring material.


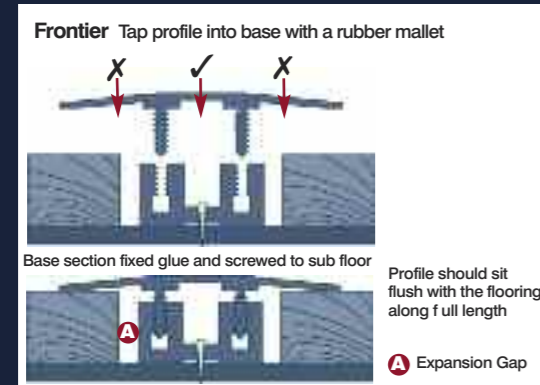


Fitting, maintenance and cleaning

Frontier Floor Trims

(Woodline, LITE, Natural, Basics and Frontier Contract)

- 1 Check that the base section of the chosen profile does not protrude above the finished height of the wood floor and is no lower than the maximum height adjustment of top section. Do not attempt to fit the top profile to the base section prior to fitting since they are not designed to come apart (with the exception of Frontier Woodline profiles).
- 2 Allowing the recommended expansion of the flooring, the selected base section should be cut to length, glued and screwed to the floor substrate using the screws provided and a propriety gun fix adhesive. In the case of woodline trims the base may be glued only, provided that the adhesive is allowed to cure to full strength before fitting the top section.
- 3 If multiple lengths of trims are to be fitted, cut the first length of base short and fix corresponding full lengths to allow the top profile to span the joints in the base sections.

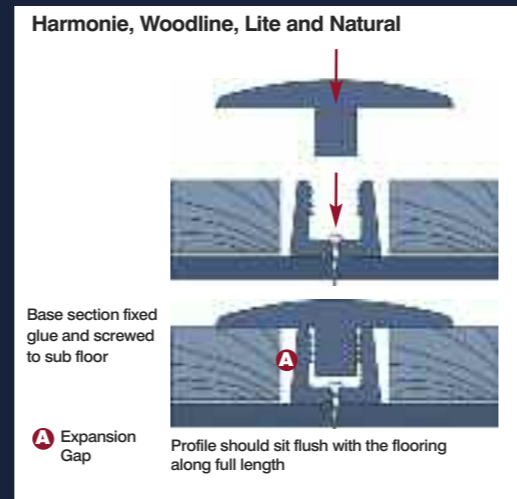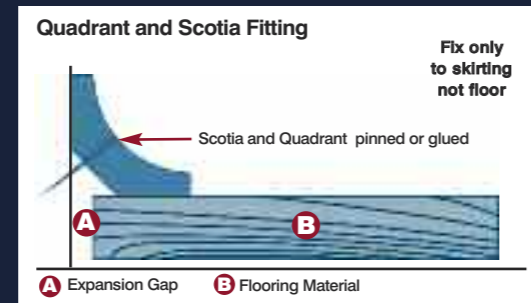

- 4 Once the base section is fitted the required top profile should be cut to length and aligned with the base. Working from one end using a rubber mallet, the top profile should be tapped down into the base section so that the profile sits flush with the flooring surface. Care should be taken that the profile locates into the base section along the full length. Tap directly on to top of the section to prevent splitting on hardwood sections.


Quadrants and Scotias

- 1 Quadrants and Scotias may be pinned or glued onto the wall or skirting using most types of gunfix or hotmelt adhesives.
- 2 Both MDF and Pre-finished hardwood quadrants can be easily mitred using a standard mitre block and fine bladed hacksaw.



Frontier Duo Nosing

- 1 Where the profile is to be fitted without the hardwood fillet, only the step tread materials should be fitted prior to fixing the nosing section. Where the profile is to be fitted with the hardwood fillet, both the tread and riser material should be fitted prior to fitting the nosing section. In both applications, the flooring materials should be fitted in accordance with the manufacturer's fitting instructions.
- 2 The stair edge section should be cut to length, glued and screwed to the step riser using a gunfix adhesive and the countersunk screws provided. Care should be taken to fit the nosing section firmly on the top of the tread material leaving no gaps. Once fitted the riser materials or hardwood fillet can be glued into place.

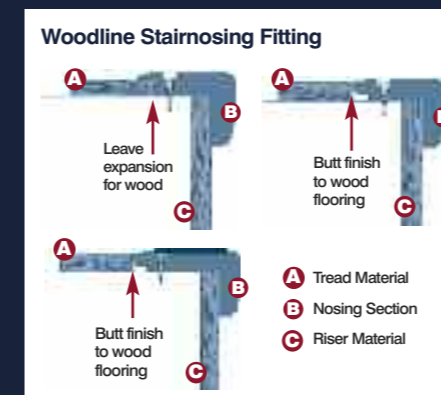

Frontier Woodline Nosing

- 1 After stair preparation, working from the top section down measure each step and cut nosings to length, numbering each nosing on the back of the profile.
- 2 The riser materials may be fitted on top of the tread material or the riser materials can be brought down to the tread with the tread materials butted to it according to preference. In both cases the riser materials should be fitted prior to fixing the nosing section and should be flush and level with the nosing edge.
- 3 Once the riser material has been fitted, push the cut length of stair nosing onto the step and mark the screw holes. Remove the nosing and drill and plug the step as required. Apply gunfix adhesive to the underside of the nosing and re-fit onto the step, screw the nosing securely into the step using the countersunk screws.
- 4 Ensure the screw heads do not protrude above the level of the insert channel. Cut the insert to 4mm longer than the length of the nosing, strip back the tape and fit the insert into the channel ensuring that it locates into the channel along the full length. The insert should be lightly rolled or pushed down along the length to ensure good adhesion between the insert and the channel. Do not stretch or roll in the insert into the channel when fitting as it will shrink back.

Frontier Sports Sports Floor Skirting

- 1 Ensure that the site is prepared, swept and clear of grit or debris as the skirting foot needs to be in direct contact with the flooring surface.
- 2 Countersink the skirting at the specified centres (if required).
- 3 45° Mitre both ends (even on straight joins to enhance the visuals of the join) and ensure the Skirting is cut to the desired length.
- 4 Apply a high grab adhesive to the back (not the foot) and push into place so that the skirting foot is resting on the floor. Ensure that the Skirting is not exerting any downward pressure on the floor.
- 5 Once all of the Skirting pieces are cut and in place, Screwfix through into the wall.
- 6 Plug countersunk hole and chisel off flat to provide a neat and clean finish (if required).



Sports Floor Skirting

Sports Floor Scotia

- 1 Ensure that the site is prepared, swept and clear of grit or debris as the Scotia needs to be in direct contact with the flooring surface.
- 2 Cut the Scotia to the desired length, complete with Mitre at both ends to strengthen and enhance the visuals of the join.
- 3 Apply a high grab adhesive to the back edge (to fit against the wall).
- 4 Push into place, ensuring that the back and bottom of the scotia are flat with the wall and floor respectively.
- 5 Once the Scotia is in the desired position, pin or nail gun to the wall.

Frontier Cover Plate

- 1 Cut the Cover Plate to the desired length and notch out around any door frames, if required.
- 2 Countersink drill holes at the desired centres, if not requested when ordered.
- 3 If using to bridge a gap between wood and another surface, place over expansion gap and Screwfix through onto the solid surface which does not require any expansion. This will allow the wood floor to move under one edge, whilst being held in place on the other.
- 4 If using to bridge a gap between two non-wood materials, Cover Plate can be drilled and fixed on either side or down the middle according to preference.

